



Landesgesellschaft
Österreich

Certificate of constancy of performance Certificate - No.: 0531 – CPR – 1317 – 0843

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation or CPR), this certificate applies to the construction product

products

see pages 2-5

produced for

**Rebloc GmbH
Wienerstrasse 662
A-3571 Gars am Kamp**

and produced in the manufacturing plant

**Franz Oberndorfer GmbH & Co. KG
Werk Herzogenburg
Sankt Pöltner Straße 117
A 3130 Herzogenburg**

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA 1.b of the standard

EN 1317-5:2007+A2:2012/AC:2012

under system 1 for the performances set out above are applied and that the construction products fulfil all the prescribed requirements for these performances.

This certificate was first issued on 05.02.2013 and will remain valid as long as the test methods and/or factory production control requirements included in the harmonised standard, used to assess the performances of the declared essential characteristics, do not change, and the construction product, and the manufacturing conditions in the plant are not modified significantly, unless suspended or withdrawn by the product certification body.

Wien, 02.11.2016



TÜV SÜD Landesgesellschaft Österreich GmbH Zertifizierungsstelle für Produkte Arsenal, Objekt 207 1030 Wien



Landesgesellschaft
Österreich

Certificate of constancy of performance

Certificate - No.: 0531 – CPR – 1317 – 0843

REBLOC RB80_8

Containment level:	N2	H1	L1
Impact severity:	B	B	B
Normalized working width:	W3	W4	W4
Normalized dynamic deflection:	0.5 m	0.7 m	0.7 m
Normalized vehicle intrusion:		VI4	VI4
Resistance to snow removal:	NPD	NPD	NPD
Assessment report number:	27917_1		

REBLOC RB80L_8*

* This system is a renamed modification based on REBLOC RB80_8_H1/W4

Containment level:	H1
Impact severity:	B
Normalized working width:	W5
Normalized dynamic deflection:	0.8 m
Normalized vehicle intrusion:	VI5
Resistance to snow removal:	NPD
Assessment report number:	56903_1


REBLOC RB100_8

Containment level:	H2	H4b
Impact severity:	B	B
Normalized working width:	W5	W6
Normalized dynamic deflection:	1.0 m	1.4 m
Normalized vehicle intrusion:	VI5	VI6
Resistance to snow removal:	NPD	NPD
Assessment report number:	27917_2	

REBLOC RB100H_2_H3/W6

Containment level:	H3
Impact severity:	B
Normalized working width:	W6
Normalized dynamic deflection:	1.2 m
Normalized vehicle intrusion:	VI9
Resistance to snow removal:	NPD
Assessment report number:	19887

Wien, 02.11.2016

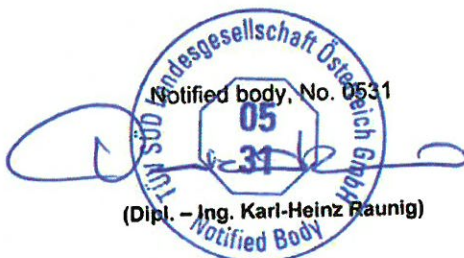

TÜV SÜD Landesgesellschaft Österreich GmbH Zertifizierungsstelle für Produkte Arsenal, Objekt 207 1030 Wien

Landesgesellschaft
Österreich

Certificate of constancy of performance

Certificate - No.: 0531 – CPR – 1317 – 0843

REBLOC RB100_2_H2/W5

Containment level:	H2
Impact severity:	B
Normalized working width:	W5
Normalized dynamic deflection:	0.9 m
Normalized vehicle intrusion:	VI 5
Resistance to snow removal:	NPD
Assessment report number:	27925

REBLOC NB100/300_8_H2/W4

Containment level:	H2
Impact severity:	B
Normalized working width:	W4
Normalized dynamic deflection:	0.3 m
Normalized vehicle intrusion:	VI 2
Resistance to snow removal:	NPD
Assessment report number:	24279

REBLOC RB80A_8_H2/W1

Containment level:	H2
Impact severity:	B
Normalized working width:	W1
Normalized dynamic deflection:	0.0 m
Normalized vehicle intrusion:	VI 2
Resistance to snow removal:	NPD
Assessment report number:	27926

REBLOC RB100A_8_H2/W1*

* This system is a renamed modification based on REBLOC RB80A_8_H2/W1

Containment level:	H2
Impact severity:	B
Normalized working width:	W1
Normalized dynamic deflection:	0.0 m
Normalized vehicle intrusion:	VI 2
Resistance to snow removal:	NPD
Modification report:	30431

REBLOC RB80H_8_H2/W5

Containment level:	H2
Impact severity:	B
Normalized working width:	W5
Normalized dynamic deflection:	1.1 m
Normalized vehicle intrusion:	VI 5
Resistance to snow removal:	NPD
Assessment report number:	21605

Wien, 02.11.2016

Notified body, No 0531

(Dipl.-Ing. Karl-Heinz Raunig)

TÜV SÜD Landesgesellschaft Österreich GmbH Zertifizierungsstelle für Produkte Arsenal, Objekt 207 1030 Wien

Landesgesellschaft
Österreich

Certificate of constancy of performance

Certificate - No.: 0531 – CPR – 1317 – 0843

REBLOC RB80L4_N2/W4

Containment level:	N2
Impact severity:	B
Normalized working width:	W4
Normalized dynamic deflection:	0.8 m
Resistance to snow removal:	NPD
Assessment report number:	32731

REBLOC RB60H_12_N2/W4

Containment level:	N2
Impact severity:	B
Normalized working width:	W4
Normalized dynamic deflection:	1.0 m
Resistance to snow removal:	NPD
Assessment report number:	32733

REBLOC RB84XEA_8

Containment level:	H2
Impact severity:	B
Normalized working width:	W1
Normalized dynamic deflection:	0.0 m
Normalized vehicle intrusion:	VI 4
Resistance to snow removal:	NPD
Assessment report number:	40550

REBLOC RB85BF_8

Containment level:	H2
Impact severity:	B
Normalized working width:	W5
Normalized dynamic deflection:	0.1 m
Normalized vehicle intrusion:	VI 1
Resistance to snow removal:	NPD
Assessment report number:	40552

REBLOC NB100H/300_8

Containment level:	H3
Impact severity:	C
Normalized working width:	W5
Normalized dynamic deflection:	0.6 m
Normalized vehicle intrusion:	VI 4
Resistance to snow removal:	NPD
Assessment report number:	40553

Wien, 02.11.2016



Landesgesellschaft
Österreich

Certificate of constancy of performance

Certificate - No.: 0531 – CPR – 1317 – 0843

REBLOC RB110L_8

Containment level:	H2
Impact severity:	B
Normalized working width:	W5
Normalized dynamic deflection:	1,0 m
Normalized vehicle intrusion:	VI 5
Resistance to snow removal:	NPD
Assessment report number:	48309

REBLOC RB80S_12_H1/W4

Containment level:	H1
Impact severity:	B
Normalized working width:	W4
Normalized dynamic deflection:	1,0 m
Normalized vehicle intrusion:	VI 5
Resistance to snow removal:	NPD
Assessment report number	56902_1

REBLOC RB80S_12_N2/W4*

* This system is a renamed modification based on REBLOC RB60H_12_N2/W4

Containment level:	N2
Impact severity:	B
Normalized working width:	W4
Normalized dynamic deflection:	1,0 m
Resistance to snow removal:	NPD
Modification report number	56902_3

Wien, 02.11.2016



TÜV SÜD Landesgesellschaft Österreich GmbH Zertifizierungsstelle für Produkte Arsenal, Objekt 207 1030 Wien

