


REBLOC RB84XEAL_8

Standard element

Area of application
Permanent system


Construction
Embedded in asphalt

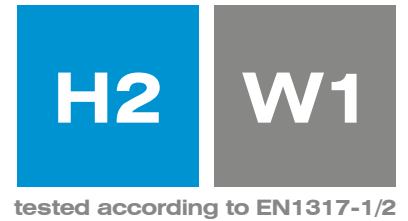

Containment level **H2** (covers H1, N1, T3, T2, T1)
Working width **W1** (covers W2, W3, W4, W5, W6, W7, W8)
Impact severity level **ASI B**

Product features & Advantages

- Only 4 cm embedment in asphalt
- Ideal application for limited space and for short minimum installation lengths
- No system movement with slim construction

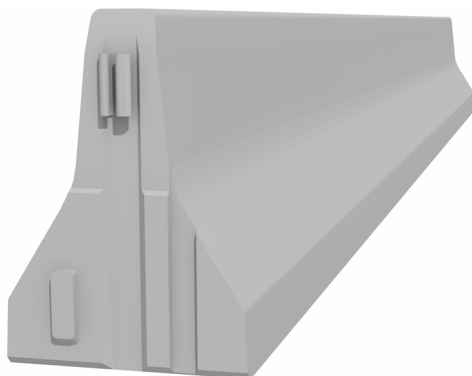

The 4 cm asphalt embedded vehicle restraint system REBLOC[®] RB84XEAL_8 is mainly used, where a high containment level is needed within a narrow space.

The installation of short barrier sections is possible due to a short minimum installation length. The system is also available with drainage openings.

The system can also be used as a free standing temporary safety barrier (temp2perm).


REBLOC RB84XEAL_8

Standard element



tested according to EN1317-1/2

Technical data

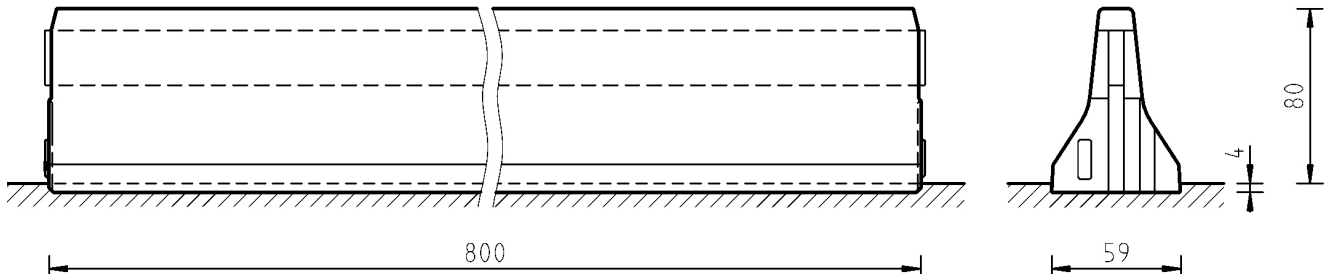

all dimensions in cm

Containment level	H2
Working width	W1
Impact severity level	ASI B
Construction	4 cm embedded in asphalt
Terminal element	not necessary, optional possible
Dimensions L x W x H in cm	800 x 59 x 84 cm
Weight/element	4.800 kg
Pcs./truck (24 t)	5 pieces
Minimum installation length	40 m
Curve radius	$r \geq 260$ m, smaller radii on request
Concrete quality	C30/37, exposure class according to national requirements
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓