

# REBLOC 85BF\_8

Standard element

Application  
**Temporary system**

Installation  
**Free standing**

**T3** **W1**  
tested according to EN1317-1/2




Containment level **T3** (covers T2 and T1)  
Working width **W1** (covers W2, W3, W4, W5, W6, W7 and W8)  
Impact severity level **ASI A**



## Produktmerkmale & Vorteile

- REBLOC SWITCH®: cost savings due to tested application as temporary and permanent system
- Single-row and single-sided system for limited space
- Permanent usage as backfilled, double-row system for H2/W5 (according to EN1317-2)

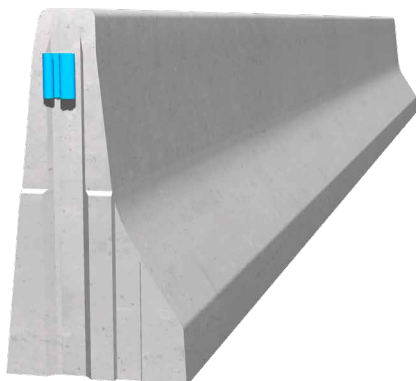

The REBLOC 85BF\_8 is designed for the REBLOC SWITCH® application. Firstly, the single-sided system is used as a temporary barrier. Afterwards, the elements are installed as a permanent, back-filled system.

Time and money is saved by reducing the number of transport journeys. In addition, the costs for the temporary system are reduced as the concrete elements are already on site.


# REBLOC 85BF\_8

Standard element



tested according to EN1317-1/2

## Technical data

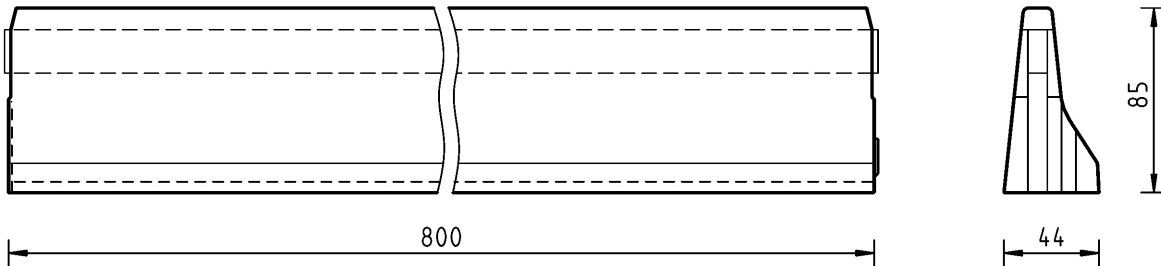

all dimensions in cm

Containment level	T3
Working width	W1
Impact severity level	ASI A
Vehicle intrusion	V11
Installation	free standing on asphalt/concrete
Terminal elements	not necessary, optional available
Dimensions L x W x H in cm	800 x 44 x 85 cm
Weight/element	4.000 kg
Elements/truck (24 t)	6 elements
Minimum installation length	80 m (not including terminal elements)
Curve radius	$r \geq 225$ m, smaller radii on request
Concrete quality	C30/37, exposure class according to national requirements
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized